


BATTERY STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING

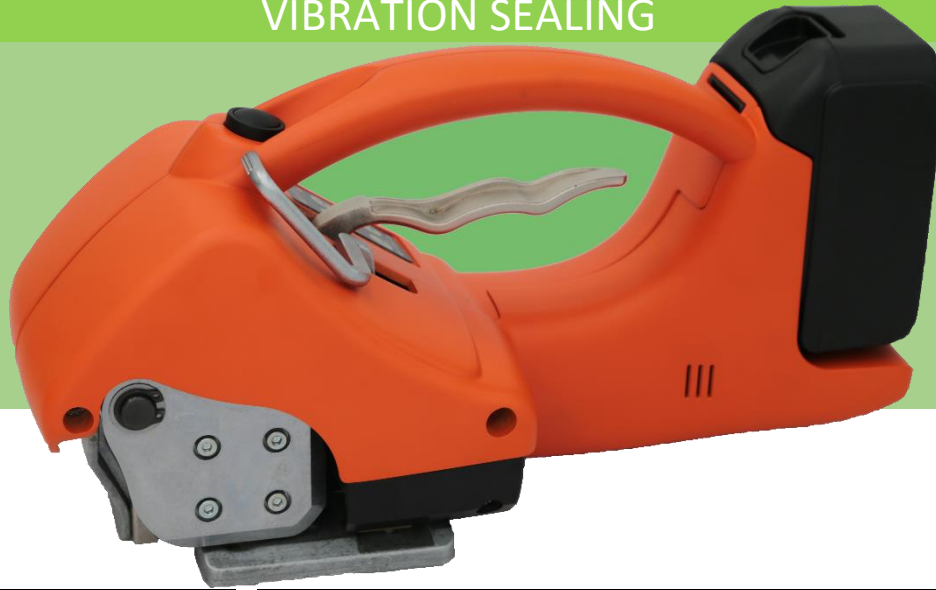

| TECHNICAL SPECIFICATIONS | |
|--------------------------|--------------------------|
| DIMENSIONS | |
| Lenght | 316 mm – 12.44" |
| Width | 140 mm – 5.51" |
| Height | 160 mm – 6.30" |
| Weight | 3.8 Kg – 8.8 lbs |
| FEEDING | |
| Battery | 14.4 V – 3 Ah Li-ion |
| PERFORMANCE | |
| Max. tension force | 1500N |
| Tensioning speed | 8 mt/min |
| Sealing | Vibration Sealing |
| Joint strenght | 75% of breaking strenght |

| MODEL | | | |
|----------|--|---|---|
| CODE | TYPE | STRAP | THICKNESS |
| T229997 | ITA22 with one battery | PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63" | 0,5±1.05mm – 0.02"±0.04" 0,5±0,7mm – 0.02"±0,03" |
| T2299971 | ITA22 with one battery and charger | PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63" | 0,5±1.05mm – 0.02"±0.04" 0,5±0,8mm – 0.02"±0,03" |
| T2299972 | ITA22 with two battery and charger | PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63" | 0,5±1.05mm – 0.02"±0.04" 0,5±0,8mm – 0.02"±0,03" |

POLYESTER STRAP



POLYPROPYLENE STRAP



**Endüstriyel
Paketleme Sistemleri**

www.pakmak.com



